



Bulk Calculations – Petroleum BCP 3.0

Project Assessment and Implementation
Guidelines (PAIG)

Notes

The latest version of this documentation can be found in the QuantityWare [Knowledge Base](#). All documentation is kept current for the combinations of latest BCS release with the latest supported SAP Oil, Gas, & Energy release. For all currently supported combinations see [Note #000086 "Support and Release \(Lifecycle\) details" page 2, "Release Lifecycle"](#).

Your release level can be determined via:

`"/o/PTYW/COCKPIT" -> "Cockpit" -> "Support Package Level"`

Version History

Version	Date	Description
00	2017-03-31	Initial Release
00 v1	2017-08-15	Links Corrected
01	2017-11-10	S/4HANA 1709 validity added
02	2019-02-17	S/4HANA 1809 validity added
03	2019-11-20	S/4HANA 1909 validity added
03 v1	2020-07-17	Editorial update
04	2021-09-24	S/4HANA 2020 / 2020_EX validity confirmed - modern QW document style applied. 30A CSP02 / 30B CSP01 changes
04v1	2021-11-15	S/4HANA 2021 / 2021_EX validity confirmed - small typographical corrections
05	2023-11-01	30A CSP03 / 30B CSP02 changes

Contents

1. Introduction	4
1.1. PAIG Complexity Cases – New Installation Projects	5
1.2. PAIG Complexity Cases - Legacy Integration Projects	7
2. Language Support	8
3. Prerequisites	9
4. Overview	10
5. The Methodology - PAIG	11
5.1. Run BCP Installation Test in Client 045	11
5.2. Definition of Units of Measurement	15
5.3. Define Product Measurement Standards	20
5.4. Assign Conversion Groups and UoM Groups to Material Master	27
5.5. Define & Implement Test Calculation Quality Procedure	28
6. Summary	30

1. Introduction

This document describes the proven QuantityWare project methodology that enables consultants to successfully design and configure quantity conversion solutions that run in an SAP Oil, Gas, & Energy ERP system. The methodology reflects the logical structure of the Petroleum Measurement Cockpit (PMC), whose design in turn was influenced heavily by the methodology.

The PMC is the single access point for measurement specialists and consultants to the QuantityWare BCP solution. Here you design, monitor, maintain and enhance complex, measurement standard based quantity conversion implementations. The PMC provides an easy to use user interface (UI), which is structured so that measurement experts and consultants can organize their work efficiently.

The methodology is called **Project Assessment and Implementation Guidelines**, or “PAIG” for short. The methodology is intended for medium to very complex requirements and/or large scale implementations (e.g. cross country, complex product portfolio, etc.), but should also be consulted for apparently easy quantity conversion implementations.

Always apply the methodology as a check list for your SAP Oil, Gas, & Energy quantity conversion implementations. By combining the PAIG methodology with the BCP QuantityWare template configuration data, you will be able to obtain a maximum return on investment:

Quantity conversion set-up is an important part of any SAP Oil, Gas, & Energy implementation project (new installation “Greenfield” or upgrade/change “Brownfield” project). It should be carefully planned and is typically the first project step before business process implementation can start; all processes are based upon a working and well-defined quantity conversion setup and product/material master definition.

Rough implementation time estimates are made for individual steps described in this methodology. Quantity conversion requirements may show large variations for different projects (e.g. number of products and standards to be supported, process integration with respect to the configurable QCI user interface, rounding requirements for calculation models and target quantity values etc.).

Thus, three **new installation** project complexity cases are defined in this chapter to help support the different kinds of SAP Oil, Gas, & Energy implementation projects.

1.1. PAIG Complexity Cases – New Installation Projects

1.1.1. Low Complexity Quantity Conversion Project:

- Make fast decisions on relevant measurement standards
- One country / similar countries with respect to measurement standards
- No legacy quantity conversion solution to be mapped
- Use QuantityWare template conversion groups (copy) with predefined model algorithm
- Use QuantityWare template reading groups (copy) with no changes to entries
- 1 to 3 conversion groups required
- Use QuantityWare range checks with predefined parameters – define and maintain ranges
- Use SAP & QuantityWare UoM template without changes
- Define manual test scenarios (effort then spreads to software life cycle)

1.1.2. Medium Complexity Quantity Conversion Project:

- Spend limited time to make decisions on relevant measurement standards
- One country / similar countries with respect to measurement standards
- No legacy quantity conversion solution to be mapped
- Use QuantityWare template conversion groups (copy) with predefined model algorithm
- Use QuantityWare template reading groups (copy) with changes to entries (e.g. descriptions, remove or add parameters)
- Up to 5 conversion groups required
- Use QuantityWare range checks with additional parameters – define and maintain ranges
- Use SAP & QuantityWare UoM template and define new UoM
- Define specific UoM rounding

1.1.3. High Complexity Quantity Conversion Project

- Spend considerable time on decision making for complex measurement standards situations (customer specific requirements, legal requirements)
- Many countries / differences with respect to measurement standards
- legacy quantity conversion solution to be mapped
- Use QuantityWare template conversion groups (copy) but change/enhance predefined model algorithm
- Use QuantityWare template reading groups (copy) with changes to entries (e.g., descriptions, remove or add parameters)
- 3 to >> 5 conversion groups required
- Use QuantityWare range checks with additional parameters – define and maintain ranges
- Use SAP & QuantityWare UoM templates and define new UoM
- Define specific UoM rounding for SAP / QW UoM and possibly own new UoM
- Define automated test scenarios (effort reduction for software life cycle)

1.2. PAIG Complexity Cases - Legacy Integration Projects


- The three project complexity cases described above assume that a new installation project – “greenfield project” – is to be planned.
- If QuantityWare BCP shall be installed and integrated into an existing SAP Oil, Gas, & Energy ERP system with a running legacy solution, additional efforts need to be considered. These additional efforts depend on the detailed legacy migration plan.
- It is recommended to **start** such a project following the CTP PAIG approach.
- As a **second project step** the migration of legacy SAP QCI C Code conversions to QuantityWare BCS conversions should be executed, following the QuantityWare API C to ABAP methodology.
- Finally, **as a third step**, this PAIG document provides the methodology for the implementation of new product quantity conversions or migration from SAP QCI to MQCI conversions.

2. Language Support

With BCP, QuantityWare ships all language dependent **customizing template entries** in four languages (listed in alphabetical order):

- English
- French
- Portuguese
- Spanish

Thus, all 400+ UoM definition texts, all 400+ conversion groups, more than 5000 reading group and range group entries (descriptions and parameter texts) are available in these four logon languages. The Petroleum Measurement Cockpit (PMC) UI itself is only available in English. Thus, you should perform the initial configuration work in English and make the final tests in your preferred language:

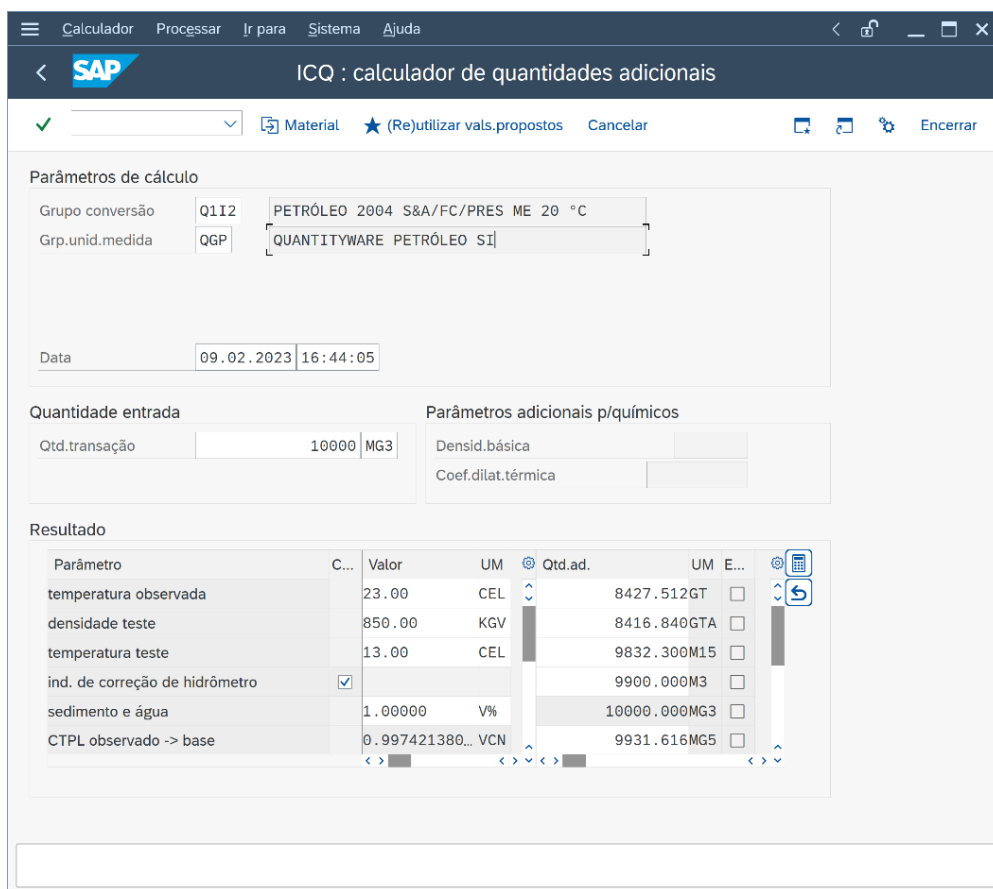

Parâmetros de cálculo

Grupo conversão: Q1I2 [PETRÓLEO 2004 S&A/FC/PRES ME 20 °C]
 Grp.unid.medida: QGP [QUANTITYWARE PETRÓLEO SI]

Data: 09.02.2023 16:44:05

Quantidade entrada **Parâmetros adicionais p/químicos**

Qtd.transação: 10000 MG3 Densid.básica: []
 Coef.dilat.térmica: []

Resultado

Parâmetro	C...	Valor	UM	Qtd.ad.	UM	E...
temperatura observada		23.00	CEL	8427.512	GT	<input type="checkbox"/>
densidade teste		850.00	KGV	8416.840	GTA	<input type="checkbox"/>
temperatura teste		13.00	CEL	9832.300	M15	<input type="checkbox"/>
ind. de correção de hidrômetro	<input checked="" type="checkbox"/>			9900.000	M3	<input type="checkbox"/>
sedimento e água		1.000000	V%	10000.000	MG3	<input type="checkbox"/>
CTPL observado -> base		0.997421380...	VCN	9931.616	MG5	<input type="checkbox"/>

3. Prerequisites

- You have concluded a usage agreement for BCP and the technical implementation of QuantityWare BCP has been completed successfully
- The appropriate BC set /QTYW/BCP_<30A/B/*> has been applied to client 045 (or equivalent client if client number 045 is already in use for other purposes)
- Composite Role Y_QTYW_CERTIFIED_CONSULTANT must be assigned to your user to be able to work with the Petroleum Measurement Cockpit
- You have successfully executed the QuantityWare installation and post installation steps described in the QuantityWare Technical Installation Documentation

Per system, the technical installation should take:

- Study documentation: 2 hours
- Package and CSP download: 15 minutes (one time for all systems)
- Installation via SAINT: 15 minutes
- Template client copy from 000: 30 minutes to 2 hours (system dependent)
- Template BC set distribution: 30 minutes
- QuantityWare installation test: 15 minutes

In total, 3-6 hours per system.

4. Overview

As noted above, these guidelines are aligned around the QuantityWare Petroleum Measurement Cockpit (PMC). The PMC provides all tools necessary to complete the challenging task of setting up sophisticated quantity conversion solutions. The PMC is accessible via transaction /n/QTYW/COCKPIT. More details on the PMC can be found in the [BCP 3.0 Documentation Reference Manual](#).

- Chapter 5 describes the implementation steps that need to be followed to complete the task successfully
- Chapter 6 provides a summary with effort estimates for the three project complexity cases described in Chapter 1

5. The Methodology - PAIG

In this chapter, we provide all relevant project steps of our Project Assessment and Implementation Guidelines (PAIG) in chronological order. If one step is a definite prerequisite before next steps can be tackled, this is noted at the beginning of each step description.

The project steps are based upon our unique and extensive experience gained through our involvement and feedback from [certified BCP consultants](#) from many customer implementations.



The completion time effort estimates are based on times for **highly skilled quantity conversion experts**.

- "L" denotes the low complexity case,
- "M" the medium complexity case,
- "H" the high complexity case.


5.1. Run BCP Installation Test in Client 045

Implementation step	1
Estimated time to completion	L: 0.1 hours M: 0.2 hours H: 1 hour
Next major step	2
Related project teams	Technical SAP basis experts or certified BCP consultants

The PMC (Petroleum Measurement Cockpit) is the central access point for all QuantityWare test tools that are delivered with BCP.


- Log on to **client 045** (or relevant client where the BCP BC set template is installed) and start transaction /n/QTYW/COCKPIT - The PMC is launched.
- Navigate to tab strip "Test Tools":

Run the Installation Test by selecting the push button: "Run Installation Test":

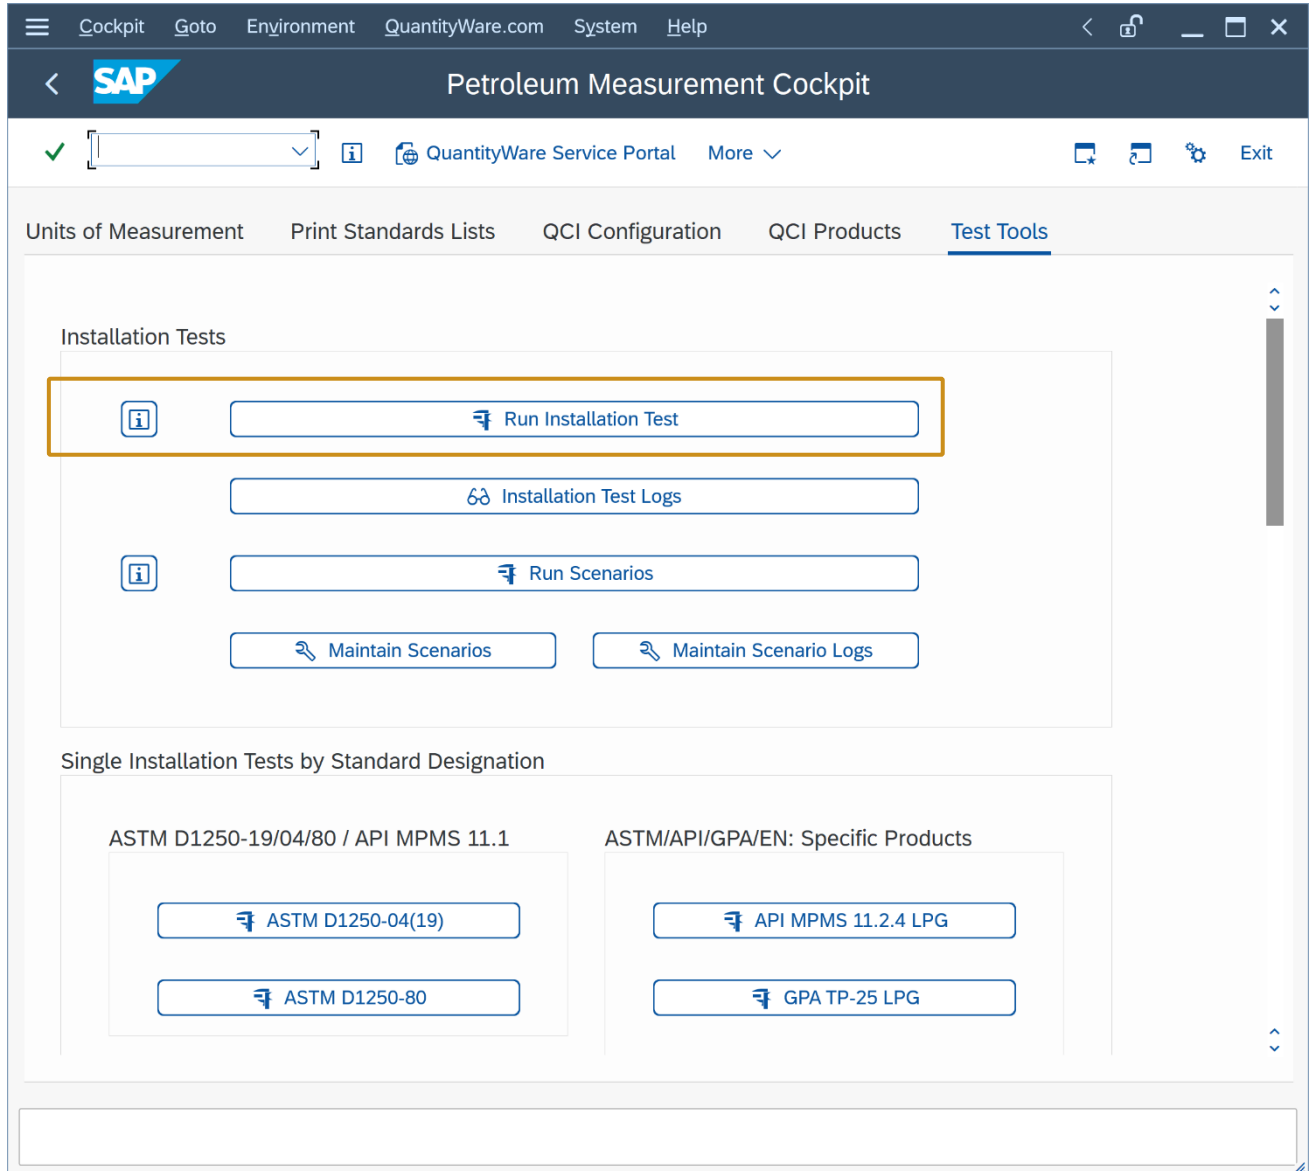

The screenshot displays the SAP Petroleum Measurement Cockpit interface. The top navigation bar includes 'Cockpit', 'Goto', 'Environment', 'QuantityWare.com', 'System', and 'Help'. The main header shows the SAP logo and 'Petroleum Measurement Cockpit'. Below the header, there are navigation tabs: 'Units of Measurement', 'Print Standards Lists', 'QCI Configuration', 'QCI Products', and 'Test Tools'. The 'Test Tools' tab is active, showing a section titled 'Installation Tests'. Within this section, the 'Run Installation Test' button is highlighted with a blue border. Other buttons in this section include 'Installation Test Logs', 'Run Scenarios', 'Maintain Scenarios', and 'Maintain Scenario Logs'. Below the 'Installation Tests' section, there is a section titled 'Single Installation Tests by Standard Designation' with two columns of buttons: 'ASTM D1250-04(19)', 'ASTM D1250-80', 'API MPMS 11.2.4 LPG', and 'GPA TP-25 LPG'.

The complete installation test run takes typically less than one minute. You should then see the following result list on your screen:

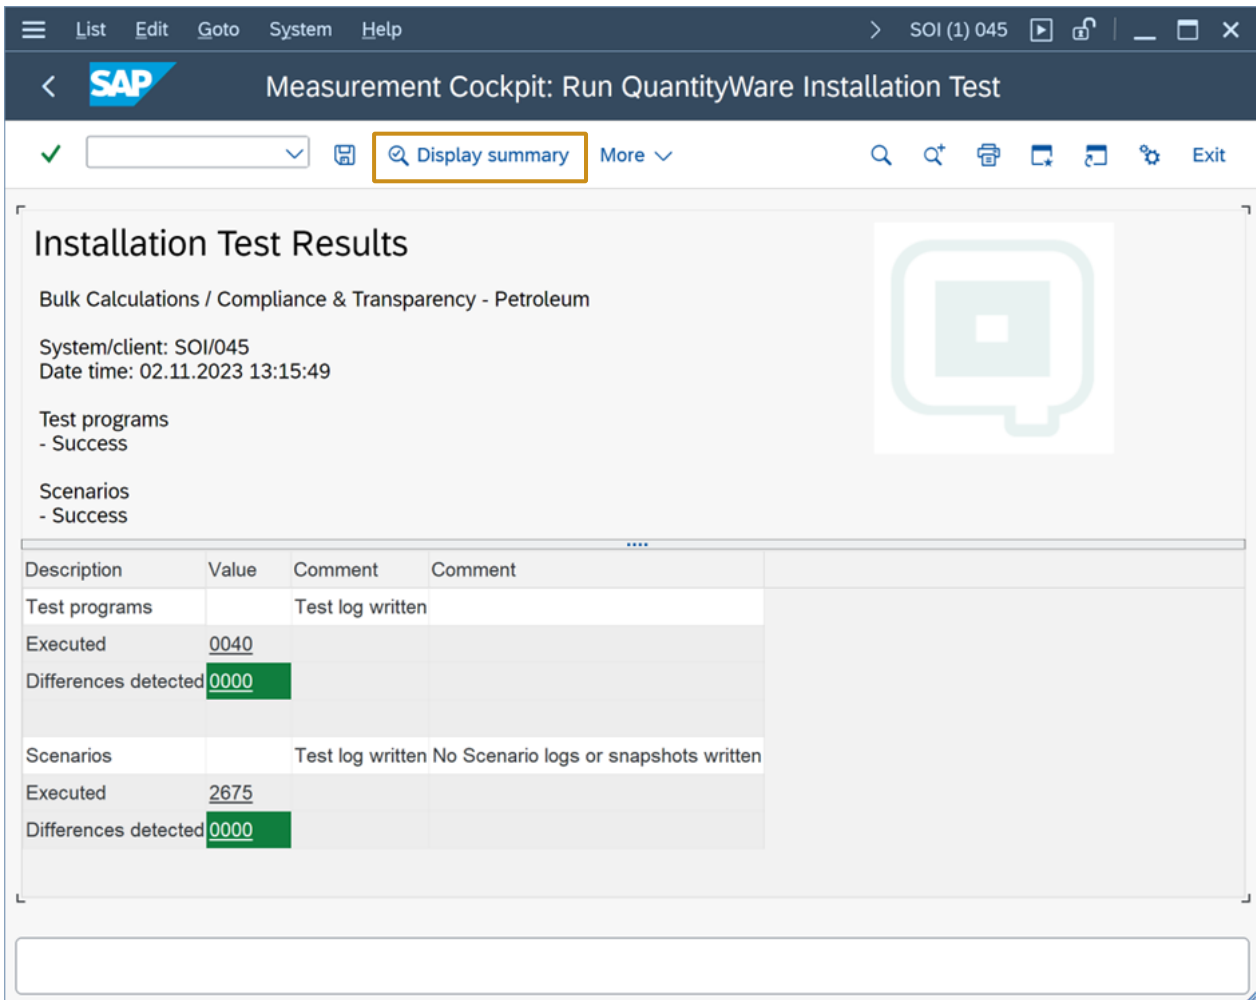

Installation Test Results

Bulk Calculations / Compliance & Transparency - Petroleum

System/client: SOI/045
Date time: 02.11.2023 13:15:49

Test programs
- Success

Scenarios
- Success

Description	Value	Comment	Comment
Test programs		Test log written	
Executed	0040		
Differences detected	0000		
Scenarios		Test log written	No Scenario logs or snapshots written
Executed	2675		
Differences detected	0000		



Select "Display Summary", then "Export to PDF" and save the installation test results to a local PDF file which you send to QuantityWare support - [QuantityWare Service Portal](#) to confirm that your installation has been validated successfully.

This completes the installation test. Your system is now ready for project implementation of the BCP quantity conversion solution.




QuantityWare strongly recommends that you develop customer project specific tests scenarios that contain manually calculated results (cross checked by at least two experts), allowing an automated check of system calculations against these expected and validated results. Then a high degree of automation is ensured, as well as system compatibility with your measurement standards during productive usage.

Alternatively, a manual test procedure with at least ten test calculation scenarios for one conversion group should be developed, which serves as a base for manual quality assurance processes.


5.2. Definition of Units of Measurement

Implementation step	2
Estimated time to completion	L: 1.5 days M: 4.5 days H: 12 days
Next major step	3
Related project teams	Measurement specialists - customer and/or certified BCP consultants

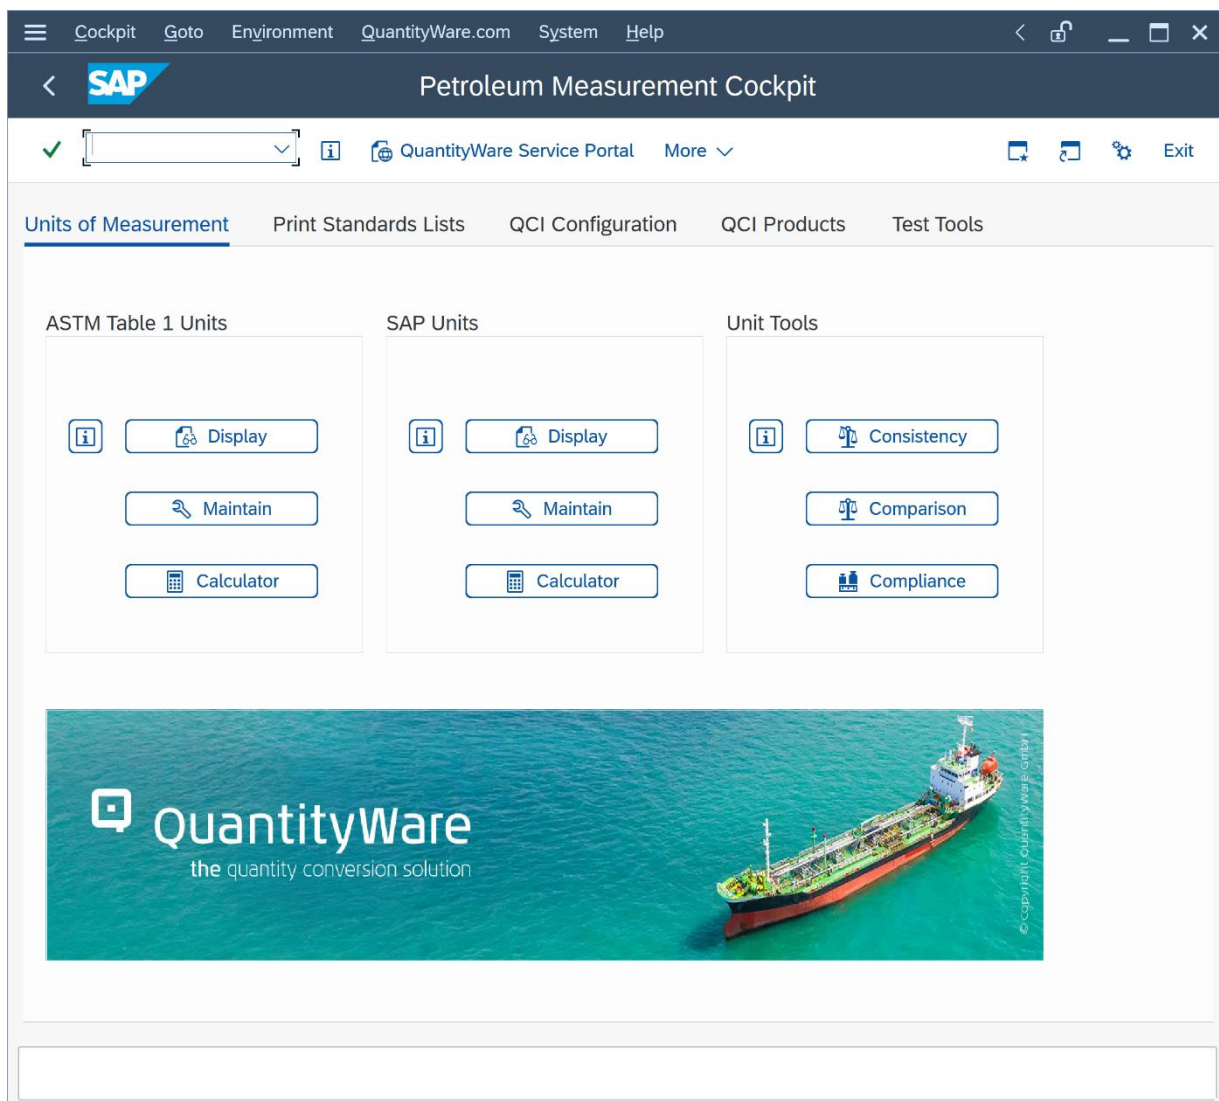

The screenshot displays the SAP Petroleum Measurement Cockpit interface. The browser address bar shows 'QuantityWare.com'. The SAP logo is visible in the top left corner. The main navigation bar includes 'Units of Measurement', 'Print Standards Lists', 'QCI Configuration', 'QCI Products', and 'Test Tools'. The 'Units of Measurement' section is active, showing three columns: 'ASTM Table 1 Units', 'SAP Units', and 'Unit Tools'. Each column contains buttons for 'Display', 'Maintain', and 'Calculator' (for ASTM and SAP) or 'Consistency', 'Comparison', and 'Compliance' (for Unit Tools). A banner at the bottom features the QuantityWare logo and the tagline 'the quantity conversion solution' over an image of an oil tanker ship.

- Collect all UoM requirements from all relevant departments
- Define all relevant Units of Measurement (UoM) and settings for quantity conversion calculations in your **project development client XXX**
- Use the Petroleum Measurement Cockpit to select your required UoM from the list of available UoM in your **project development client XXX**
- Document your required UoM
- If UoM are missing in **your project development client XXX**, select missing UoM definitions in the QuantityWare template **client 045** and transport these UoM into **your project development client XXX**
- Define & select UoM Compliance Reference Data in template client 045 and transport required reference data to your project development client
- Run UoM Compliance Analysis in **your project development client XXX** and resolve issues, if any are found:

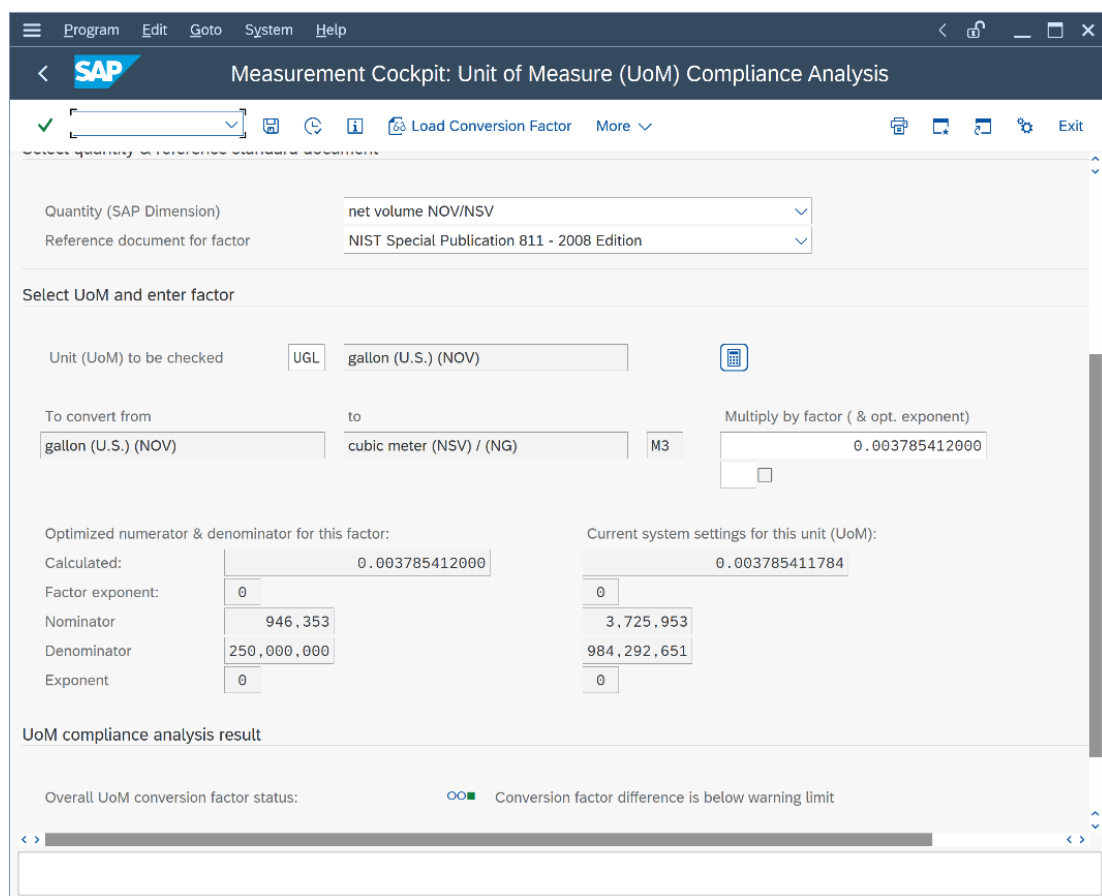

The screenshot shows the SAP Measurement Cockpit interface for UoM Compliance Analysis. The title bar indicates the program is 'Measurement Cockpit: Unit of Measure (UoM) Compliance Analysis'. The main content area includes the following sections:

- Quantity (SAP Dimension):** net volume NOV/NSV
- Reference document for factor:** NIST Special Publication 811 - 2008 Edition
- Select UoM and enter factor:**
 - Unit (UoM) to be checked: UGL gallon (U.S.) (NOV)
 - To convert from: gallon (U.S.) (NOV)
 - to: cubic meter (NSV) / (NG)
 - Multiply by factor (& opt. exponent): 0.003785412000
- Optimized numerator & denominator for this factor:**

Calculated:	0.003785412000
Factor exponent:	0
Nominator:	946,353
Denominator:	250,000,000
Exponent:	0
- Current system settings for this unit (UoM):**

Calculated:	0.003785411784
Factor exponent:	0
Nominator:	3,725,953
Denominator:	984,292,651
Exponent:	0
- UoM compliance analysis result:**


Overall UoM conversion factor status: ● Conversion factor difference is below warning limit

5.2.1. Units of Measurements - Usage

Implementation step	2.1.
Estimated time to completion	L: 4 hours M: 12 hours H: 40 hours
Next step	2.2
Related project teams	Measurement specialists - customer and certified BCP consultants

Collect all Units of Measurement (UoM) that are relevant for the business processes, i.e. UoM required for:

- Stock keeping (Bulk products are kept in stock with several UoM in parallel)
- Pricing
- Reporting
- Sales
- Financials
- Excise Duty

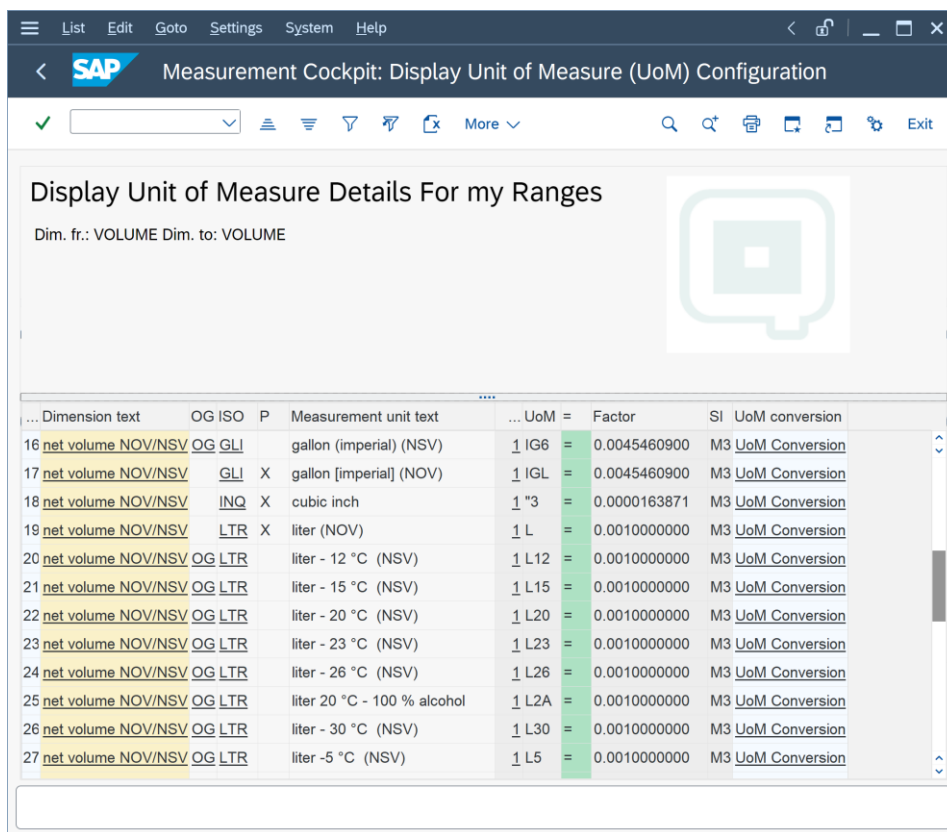

... Dimension text	OG ISO	P	Measurement unit text	... UoM =	Factor	SI	UoM conversion
16 net volume NOV/NSV OG GLI	GLI	X	gallon (imperial) (NSV)	1 IG6 =	0.0045460900	M3	UoM Conversion
17 net volume NOV/NSV OG LTR	GLI	X	gallon [imperial] (NOV)	1 IGL =	0.0045460900	M3	UoM Conversion
18 net volume NOV/NSV INQ	INQ	X	cubic inch	1 "3 =	0.0000163871	M3	UoM Conversion
19 net volume NOV/NSV LTR	LTR	X	liter (NOV)	1 L =	0.0010000000	M3	UoM Conversion
20 net volume NOV/NSV OG LTR	LTR		liter - 12 °C (NSV)	1 L12 =	0.0010000000	M3	UoM Conversion
21 net volume NOV/NSV OG LTR	LTR		liter - 15 °C (NSV)	1 L15 =	0.0010000000	M3	UoM Conversion
22 net volume NOV/NSV OG LTR	LTR		liter - 20 °C (NSV)	1 L20 =	0.0010000000	M3	UoM Conversion
23 net volume NOV/NSV OG LTR	LTR		liter - 23 °C (NSV)	1 L23 =	0.0010000000	M3	UoM Conversion
24 net volume NOV/NSV OG LTR	LTR		liter - 26 °C (NSV)	1 L26 =	0.0010000000	M3	UoM Conversion
25 net volume NOV/NSV OG LTR	LTR		liter 20 °C - 100 % alcohol	1 L2A =	0.0010000000	M3	UoM Conversion
26 net volume NOV/NSV OG LTR	LTR		liter - 30 °C (NSV)	1 L30 =	0.0010000000	M3	UoM Conversion
27 net volume NOV/NSV OG LTR	LTR		liter -5 °C (NSV)	1 L5 =	0.0010000000	M3	UoM Conversion

5.2.2. Units of Measurements - Definitions

Implementation step	2.2.
Estimated time to completion	L: 4 hours M: 16 hours H: 40 hours
Next step	2.3
Related project teams	Measurement specialists - customer and/or certified BCP consultants

Define & check the following parameters for all UoM that are relevant for your business processes **in development client XXX**


- Rounding (display and calculation)
- Significant digits
- Commercial keys
- Descriptions
- **Conversion factors**

The conversion factors of the QuantityWare Template UoM have been validated via the UoM Compliance Analysis in client 045 and can be used as a reference for your customer specific UoM compliance analysis **in the development client XXX**.

5.2.3. Define Unit of Measurement Groups

Implementation step	2.3.
Estimated time to completion	L: 4 hours M: 8 hours H: 16 hours
Next step	3
Related project teams	Inventory mangers customer & department specialists & certified BCP consultant


For all materials, define a collection of UoM, which is added to a UoM group in **your project development client XXX**. The UoM group is then assigned to the material master. Stock keeping is done in parallel for all UoM that are defined in the UoM group. Typically, you assign at least one weight UoM, one mass UoM, and a standardized volume UoM (e.g. L15, L20, UG6, GG6 ...) to a UoM group.

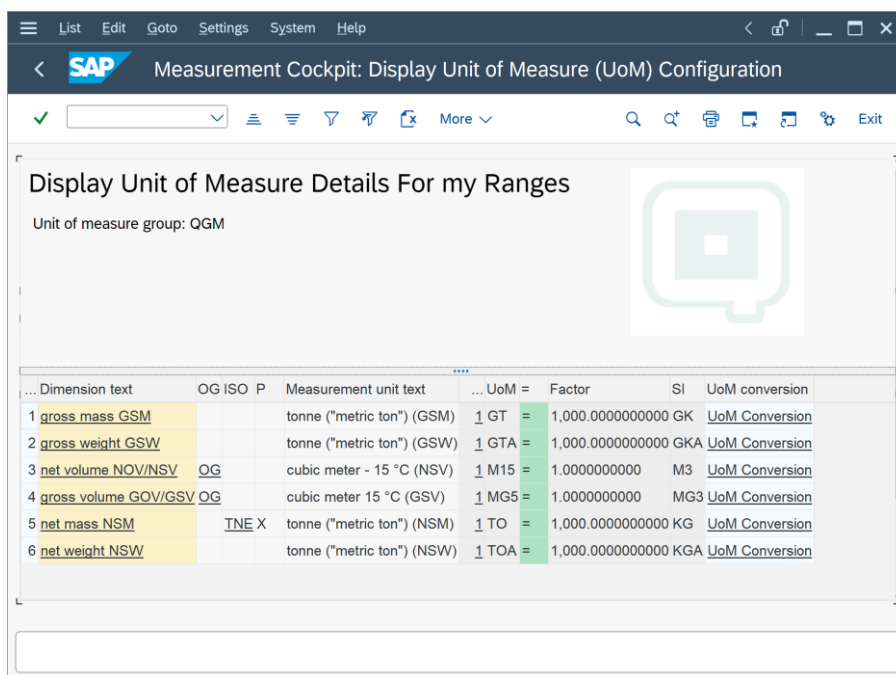

Once a UoM group is assigned to a material and stock has been posted, it **cannot** be changed in ECC 600. Read SAP note 145824 for details. S/4HANA 1610 onwards supports the addition of a UoM to a UoM group via the utilization of a special SAP report which must be run locally in every SID.

5.3. Define Product Measurement Standards

Implementation step	3
Estimated time to completion	L: 2 days M: 7 days H: 16.5 days
Next major step	4
Related project teams	Master data team – material master & certified BCP consultant

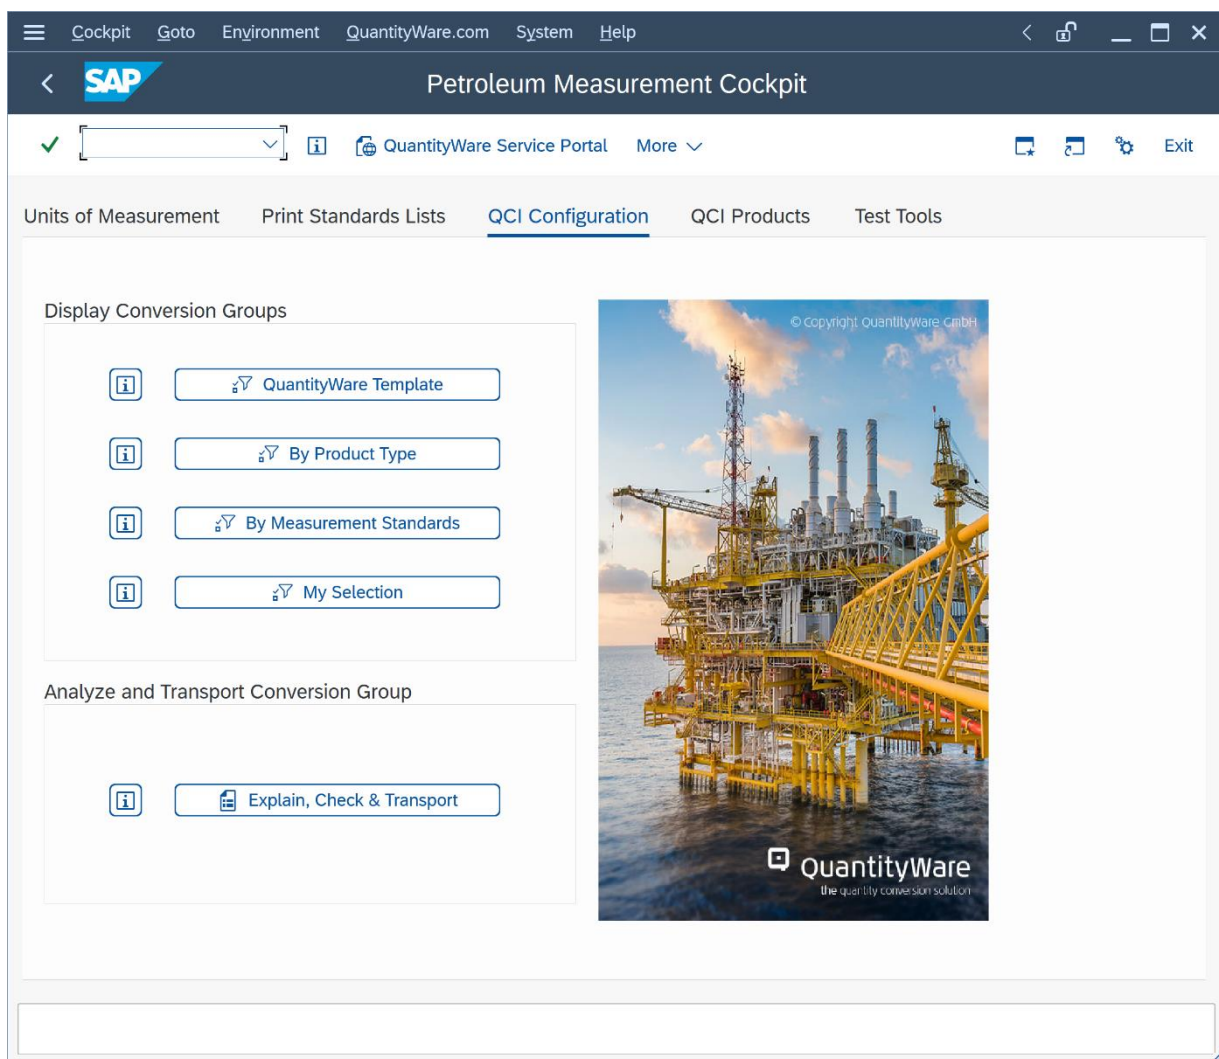

Establish expert team (certified BCP consultants and company business experts). Align with master data team.



If you require quantity conversion calculations that map existing legacy system calculations, collect legacy system conversion data – example calculations - and contact QuantityWare for chargeable expert consultancy – a solution feasibility analysis is required, which may need additional customer specific developments.

Conversion group calculations are determined by 4 different measurement standards:

- UoM conversion standards
- Mass-to-weight conversion standards
- CT(P)L standards (“effect of temperature and pressure on liquid”)
- Calculation model standards

Therefore, you need to define all four standards for each of your products.



Read the BCP Supported Standards Manual, which provides important guidance how to map products to CT(P)L standards.

5.3.1. Define Raw Data List

Implementation step	3.1.
Estimated time to completion	L: 4 hours M: 8 hours H: 20 hours
Next step	3.2
Related project teams	Master data team – material master

You should define a raw data list of all bulk materials / products that require dynamic quantity conversions. Classify the products following the classification scheme as defined in the QuantityWare **template client 045**, which contains more than 520 template conversion groups. The classification scheme is available via the Petroleum Measurement Cockpit using tab “QCI Configuration” -> “QuantityWare Template”.

Additional information/documentation for all supported standards and products can be found on the QuantityWare website.

5.3.2. Assign & Confirm – Standards for Products

Implementation step	3.2
Estimated time to completion	L: 4 hours M: 16 hours H: 20 hours
Next step	3.3.
Related project teams	Measurement specialists - customer and/or certified BCP consultants

You need to define the following standards for your products:

- UoM conversion standards
- Mass-to-weight conversion standards
- CT(P)L standards (“effect of temperature and pressure on liquid”)
- Calculation model standards


For many products (e.g. crude, diesel, gasoline ...), several standards (e.g. national standards versus a global standard) or differing versions of standards are available. Contact the business owners and discuss the list to define which standards and which versions are relevant. Define standard versions for

all products. Confirm and document specific national business requirements. Confirm and document specific national legal requirements.

5.3.3. Assign QuantityWare Template Conversion Groups

Implementation step	3.3
Estimated time to completion	L: 4 hours M: 12 hours H: 32 hours
Next step	3.4.
Related project teams	Measurement specialists - customer and/or certified BCP consultants

Define a list of relevant QuantityWare template conversion groups as a basis for your customer specific conversion groups. In the PMC, the QuantityWare template conversion groups in client 045 can be displayed and analyzed via tab strip “QCI configuration”: Select button: “QuantityWare Template” and select the relevant product groups or select button: “By Measurement Standards” if you already know which standards are required. For all major product groups, the QuantityWare template contains pre-configured conversion groups both for the SAP QCI and QuantityWare MQCI. Both SAP QCI and MQCI conversion groups are technically linked to the SAP Oil, Gas, & Energy ERP system via the [SAP QCI](#) interface to ERP processes. MQCI conversion groups provide much greater configuration flexibility, which may be required by your business processes.

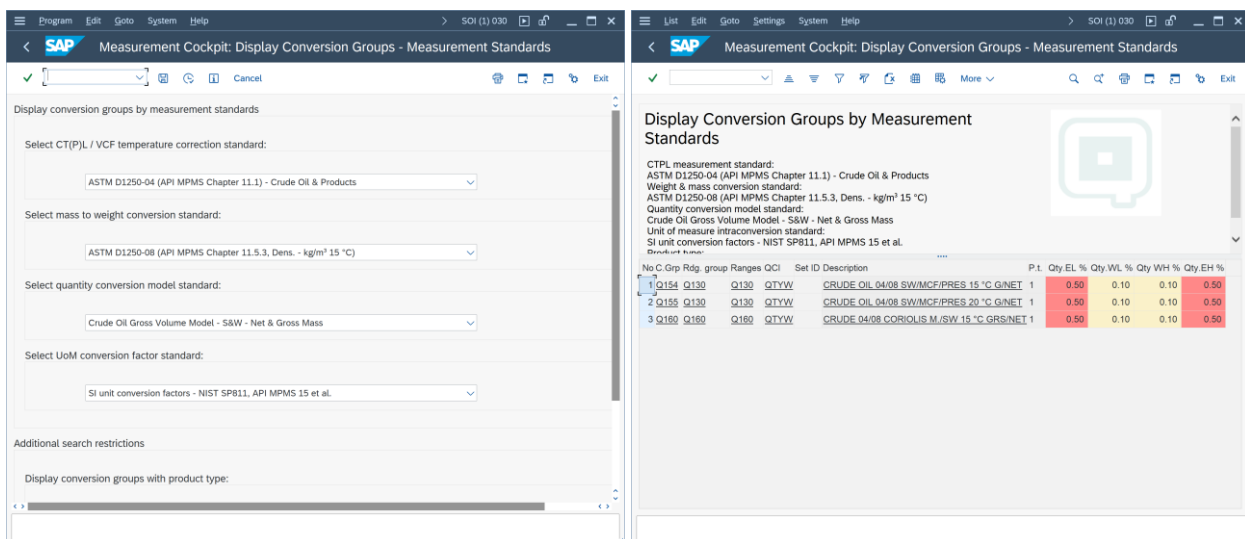

5.3.4. Copy Template Conversion / Reading / Range Groups

Implementation step	3.4.
Estimated time to completion	L: 4 hours M: 20 hours H: 60 hours
Next step	3.5
Related project teams	Measurement specialists - customer and/or certified BCP consultants

Copy the relevant QuantityWare template conversion groups and reading groups from Q*** to Z*** (customer name space range) **in client 045** and transport your configuration into your **project development client XXX** (e.g. using transaction SCC1) or via SAP TMS (Transport Management System) from the template **client 045**.

Although many QuantityWare template conversion groups can theoretically be used in production with a few adjustments based on your requirements, **we strongly recommend that you perform the copy described above to keep the template intact**. Typically, you need to:

- Change settings in a conversion group for rounding procedures
- Add or remove reading group parameters depending on business requirements
- Change parameter names to customer specific business terminology
- For complex requirements, add specific conversion functions to the MQCI model sequence
- Define ranges for reading group parameters (warning and error messages)

The time required for this step depends heavily on the complexity of your project.



A reading group is linked to a conversion group and defines which parameters (temperature, density, etc.) are required for the conversion. It also defines which results are displayed to a user (base density in air, VCF, etc.).

All QuantityWare customizing transactions are accessible via the PMC.

5.3.5. Define Test Calculation Matrix for Conversion Groups



Implementation step	3.5
Estimated time to organize	L: 1 day M: 3 days H: 10 days
Next step	4
Related project teams	Master data team – material master

For each conversion group, define at least four test calculations (e.g. with varying observed temperature values, for all UoM in the UoM group) in your **project development client XXX** and calculate the expected results using e.g. a pocket calculator or PC calculator (64 bit FLTP processor).



The PMC provides list printouts of all relevant measurement standards. Use these printouts to obtain the VCF (volume correction factors) for your example calculations (QuantityWare standard implementations are validated in the implementation step). QuantityWare also recommends that you obtain your own measurement standard copy from the relevant standard organization as a reference and to allow the validation to be cross-checked.

The list of sources for measurement standards can be found in QuantityWare [Note 000008](#)

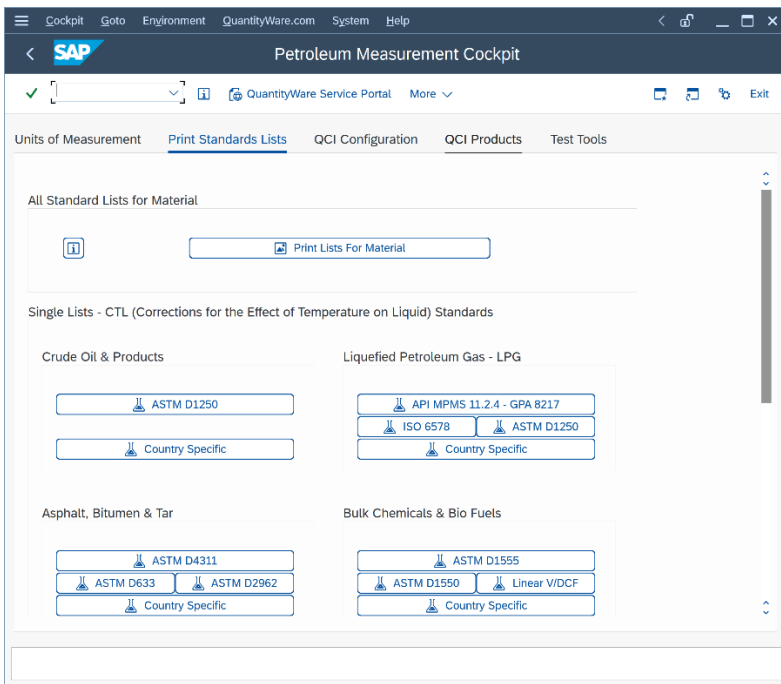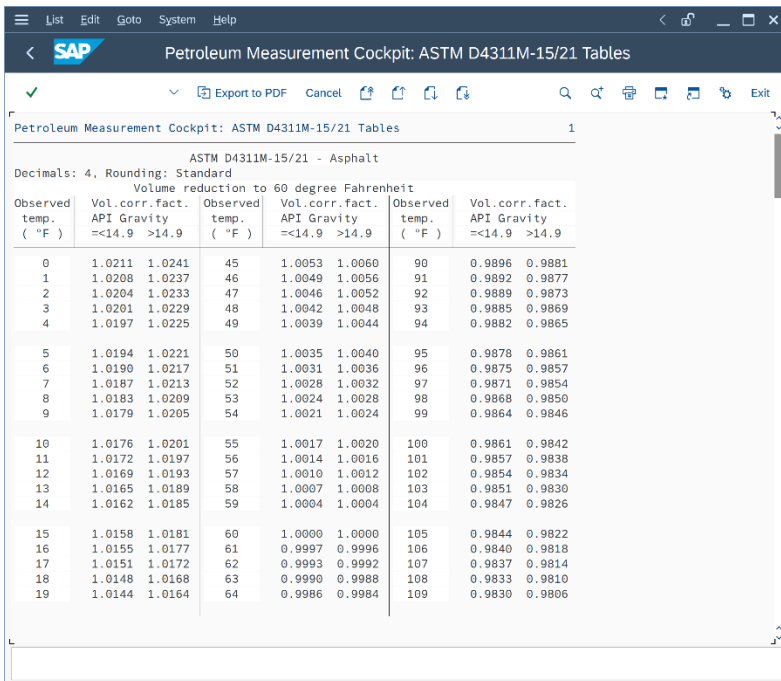
The screenshot shows the SAP Petroleum Measurement Cockpit interface displaying the ASTM D4311M-15/21 Tables. The table is titled 'ASTM D4311M-15/21 - Asphalt' and shows 'Decimals: 4, Rounding: Standard'. The table is organized into columns for 'Observed temp. (°F)', 'Vol. corr. fact. API Gravity = <14.9 >14.9', and 'Observed temp. (°F)', 'Vol. corr. fact. API Gravity = <14.9 >14.9'. The table contains 19 rows of data, with columns for 'Observed temp. (°F)', 'Vol. corr. fact. API Gravity = <14.9 >14.9', 'Observed temp. (°F)', 'Vol. corr. fact. API Gravity = <14.9 >14.9', 'Observed temp. (°F)', and 'Vol. corr. fact. API Gravity = <14.9 >14.9'.

Observed temp. (°F)	Vol. corr. fact. API Gravity = <14.9 >14.9	Observed temp. (°F)	Vol. corr. fact. API Gravity = <14.9 >14.9	Observed temp. (°F)	Vol. corr. fact. API Gravity = <14.9 >14.9
0	1.0211 1.0241	45	1.0053 1.0060	90	0.9896 0.9881
1	1.0208 1.0237	46	1.0049 1.0056	91	0.9892 0.9877
2	1.0204 1.0233	47	1.0046 1.0052	92	0.9889 0.9873
3	1.0201 1.0229	48	1.0042 1.0048	93	0.9885 0.9869
4	1.0197 1.0225	49	1.0039 1.0044	94	0.9882 0.9865
5	1.0194 1.0221	50	1.0035 1.0040	95	0.9878 0.9861
6	1.0190 1.0217	51	1.0031 1.0036	96	0.9875 0.9857
7	1.0187 1.0213	52	1.0028 1.0032	97	0.9871 0.9854
8	1.0183 1.0209	53	1.0024 1.0028	98	0.9868 0.9850
9	1.0179 1.0205	54	1.0021 1.0024	99	0.9864 0.9846
10	1.0176 1.0201	55	1.0017 1.0020	100	0.9861 0.9842
11	1.0172 1.0197	56	1.0014 1.0016	101	0.9857 0.9838
12	1.0169 1.0193	57	1.0010 1.0012	102	0.9854 0.9834
13	1.0165 1.0189	58	1.0007 1.0008	103	0.9851 0.9830
14	1.0162 1.0185	59	1.0004 1.0004	104	0.9847 0.9826
15	1.0158 1.0181	60	1.0000 1.0000	105	0.9844 0.9822
16	1.0155 1.0177	61	0.9997 0.9996	106	0.9840 0.9818
17	1.0151 1.0172	62	0.9993 0.9992	107	0.9837 0.9814
18	1.0148 1.0168	63	0.9990 0.9988	108	0.9833 0.9810
19	1.0144 1.0164	64	0.9986 0.9984	109	0.9830 0.9806

Calculate all expected results and have them cross-checked by a second expert. Document your results. The next step is to compare the expected results with the results obtained from the Oil & Gas test calculator, which can be accessed from the PMC. Document the degree of similarity. If deviations are found, analyze the conversions (manual and system) to determine the deviation reason.

5.4. Assign Conversion Groups and UoM Groups to Material Master

Implementation step	4
Estimated time to completion	L: 0.5 day M: 2 days H: 4 days
Next step	5
Related project teams	Master data team – material master

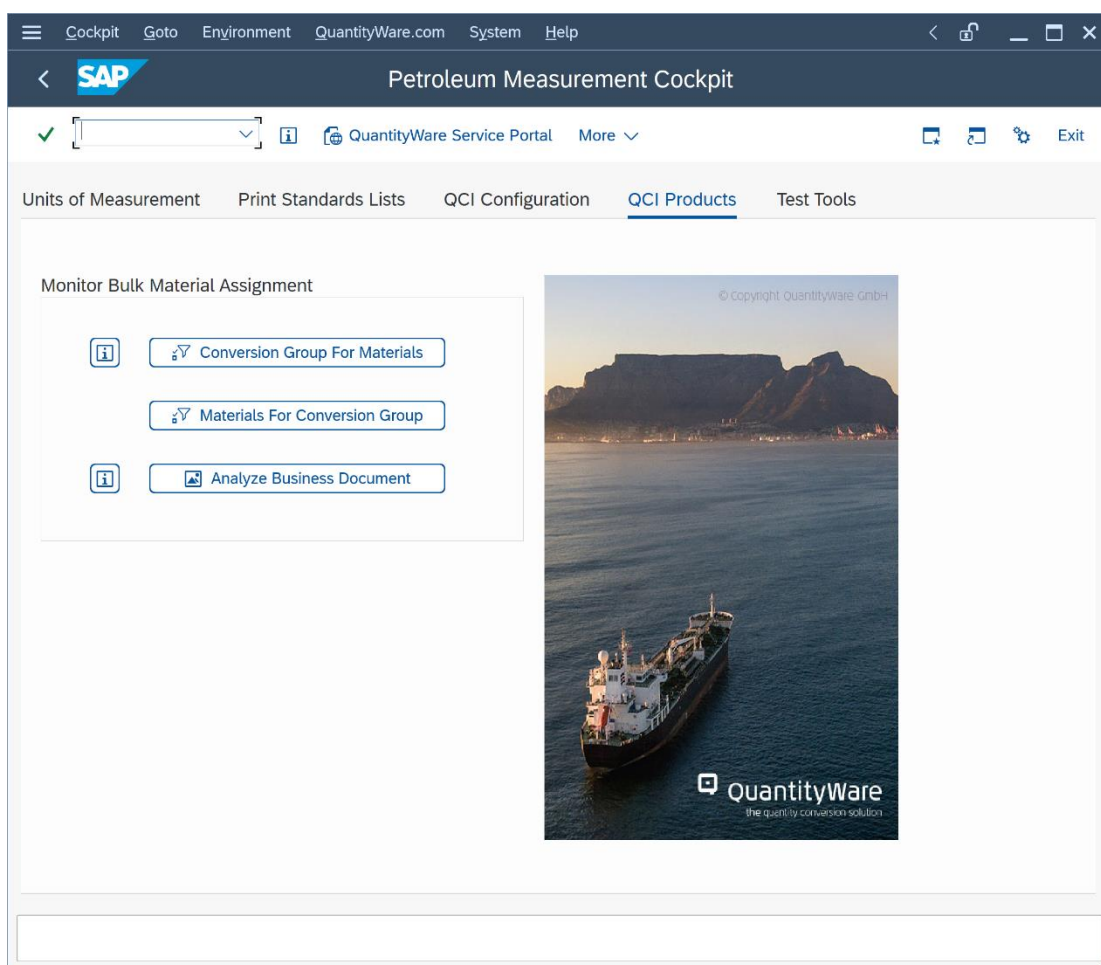


Assign the conversion groups and UoM groups to all materials (at plant level) in your **project development client XXX**. Once you are finished, check the assignment via tab strip "QCI Products"-> "Conversion Group for Materials" in the PMC to ensure that all materials are correctly set up.

Test the quantity conversion results once more using the Oil & Gas test calculator, this time with the material & plant data.

5.5. Define & Implement Test Calculation Quality Procedure

Implementation step	5
Estimated time to completion	L: 2 days M: 7 days H: 17 days
Next step	-
Related project teams	Master data team – material master

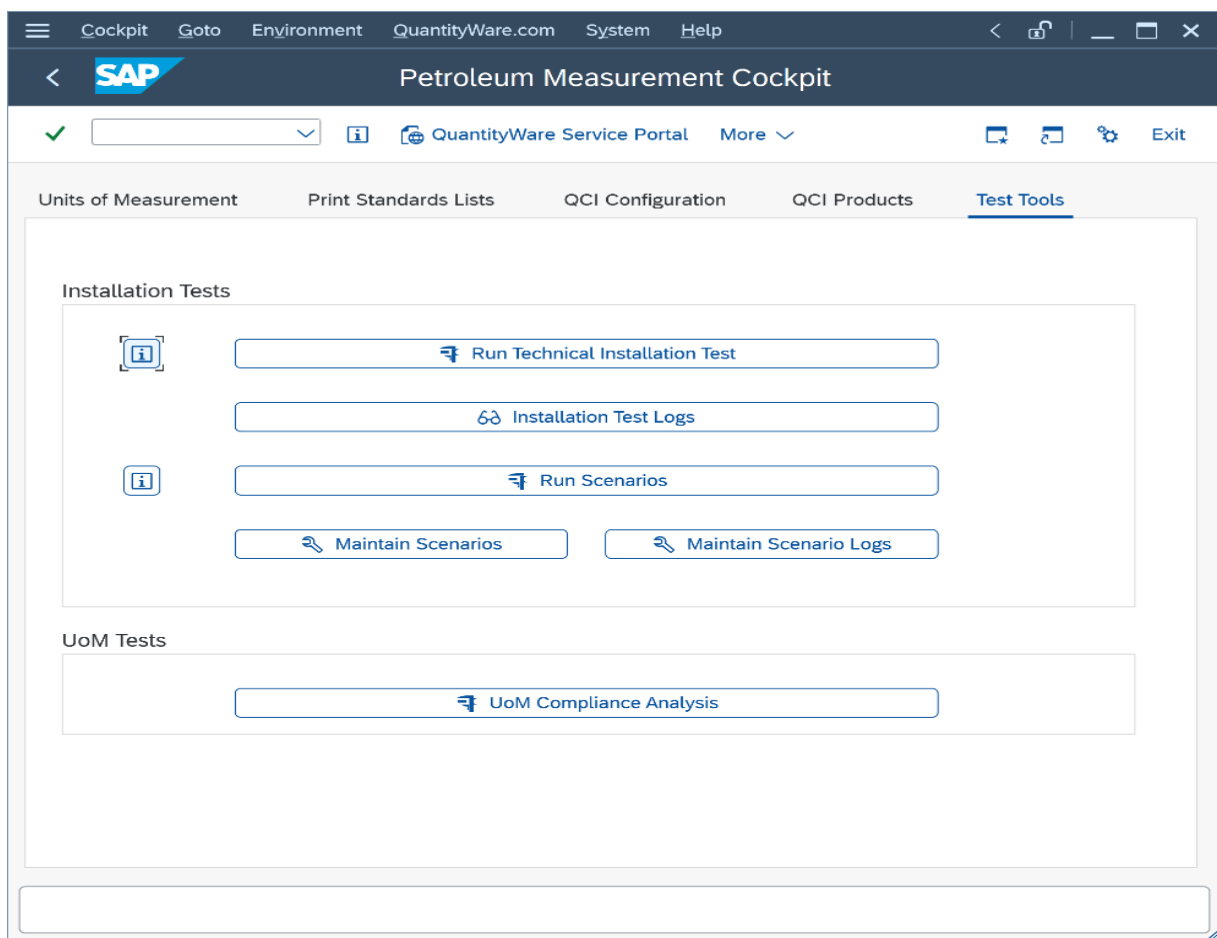

Define the overall quality assurance test procedure for the software life cycle. There are two main options:


- Either define a manual procedure – complex manual tests using the Oil & Gas test calculator after system changes (e.g., SAP Enhancement Package updates)
- Or, in your **project development client XXX**: Develop fully automated test scenarios (e.g. using a spreadsheet for each calculation) and then use the QuantityWare test tool to store your tests in

the system, transport the test scenarios to any required system and run them at any desired point in time in your system



For the development of automated test scenarios based on your test example definitions an experienced measurement consultant requires 2 to 17 days (Low to High complexity case), including definition of the test scenarios in the system, which is included in the previous figures. 90% of this time is required for the manual calculation of the expected results.

If you decide to develop fully automated test scenarios, you can monitor the status of your QCI calculations via one central list (PMC – QCI Products -> Conversion Groups for Materials):

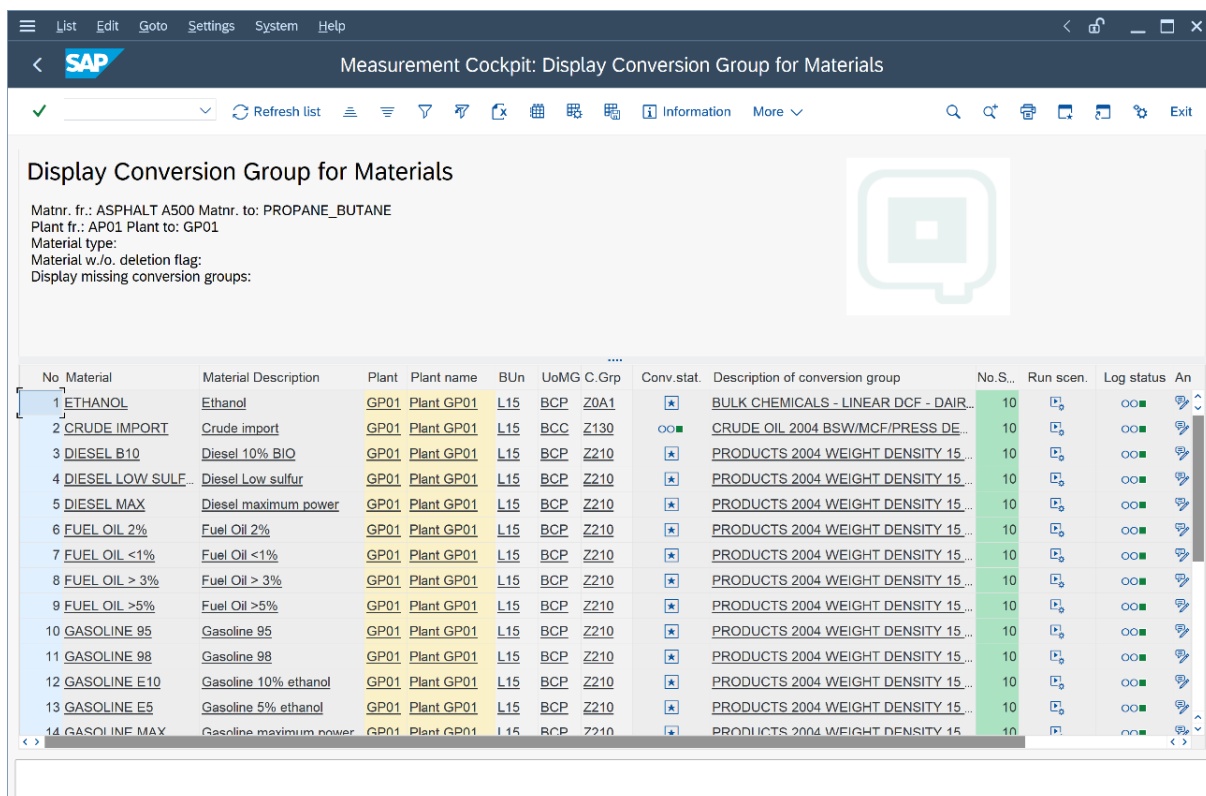

No.	Material	Material Description	Plant	Plant name	BU	UoMG C.Grp	Conv.stat.	Description of conversion group	No.S.	Run scen.	Log status	An
1	ETHANOL	Ethanol	GP01	Plant GP01	L15	BCP Z0A1	★	BULK CHEMICALS - LINEAR DCF - DAIR...	10	📄	🟢	🔍
2	CRUDE IMPORT	Crude import	GP01	Plant GP01	L15	BCC Z130	🟢	CRUDE OIL 2004 BSW/MCF/PRESS DE...	10	📄	🟢	🔍
3	DIESEL B10	Diesel 10% BIO	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
4	DIESEL LOW SULF...	Diesel Low sulfur	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
5	DIESEL MAX	Diesel maximum power	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
6	FUEL OIL 2%	Fuel Oil 2%	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
7	FUEL OIL <1%	Fuel Oil <1%	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
8	FUEL OIL > 3%	Fuel Oil > 3%	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
9	FUEL OIL >5%	Fuel Oil >5%	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
10	GASOLINE 95	Gasoline 95	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
11	GASOLINE 98	Gasoline 98	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
12	GASOLINE E10	Gasoline 10% ethanol	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
13	GASOLINE E5	Gasoline 5% ethanol	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍
14	GASOLINE MAX	Gasoline maximum power	GP01	Plant GP01	L15	BCP Z210	★	PRODUCTS 2004 WEIGHT DENSITY 15...	10	📄	🟢	🔍

From this list, you may run scenarios at any point in time, monitor the log status, and if an error is reported, utilize the snapshot tool to easily analyze the root cause of the error.

6. Summary

After you have completed the test calculation procedure based on your test conversion matrix and established functional correctness of your conversion configuration, you can hand over your work to the overall project team. You have now established a state-of-the-art quantity conversion solution for the project, which can be tested, monitored (and extended in the same way as described above) via the PMC.

The time estimates for a Low, Medium and High complexity projects are summarized in the list below (rounded to full working days - new implementation project):

Complexity	Low	Medium	High
Effort estimate (days):	7	24	60

As noted in chapter 1.1.4., added complexity needs to be considered if BCP is implemented “into” an existing productive system landscape. Depending on the customer specific system set up and requirements, **between 5 and 50++ days of effort need to be considered.**

These estimates assume that an **experienced** quantity conversion consultant (strongly recommended to be certified for QuantityWare BCP) leads these tasks, and the quantity conversion implementation sub-project is well embedded into the overall implementation project, with established communication and decision channels.

The overheads of geographic separation and differing organization-internal procedures are not considered in the figures.

Legal Notices

© Copyright 2023 QuantityWare GmbH. All rights reserved.

SAP, R/3, mySAP, mySAP.com, xApps, xApp, SAP NetWeaver, and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP AG in Germany and in several other countries all over the world. All other product and service names mentioned are the trademarks of their respective companies.

Microsoft, Windows, SQL-Server, PowerPoint and Outlook are registered trademarks of Microsoft Corporation.

These materials and the information therein are subject to change without notice. These materials are provided by the company QuantityWare GmbH for informational purposes only. There is no implied representation or warranty of any kind, and QuantityWare GmbH shall not be liable for errors or omissions with respect to the materials provided. The only warranties for the products and services of QuantityWare GmbH are those set forth in the express warranty statements accompanying such products and services, if any. No statement within this document should be construed as constituting an additional warranty.