



QuantityWare Working Paper

LPG Vapor Space Calculations

Advanced LPG stock and product transfer control using QuantityWare BCP & BCG conversion groups with SAP Oil & Gas Tank Management.

Version History

Version	Date	Description
00	2009-12-21	Initial Version
00_01	2017-08-02	Editorially revised and confirmed
01	2021-09-24	Modern QW document style applied

Contents

1. Introduction	4
2. LPG tank measurements – stock control	5
3. BCP & BCG conversion group calculations	8
4. Conclusion	13

1. Introduction

Liquefied petroleum gas (LPG) is a major global energy source. Products such as commercial propane, commercial butane and varying mixtures of propane, butane, propylene, butylene etc. are traded all over the world to support the energy needs of industrial and private consumers.

QuantityWare BCP and BCG are the only commercial solutions which provide quantity conversions for all LPG products with the SAP Oil & Gas solution. One important aspect of LPG quantity calculations is that LPG products show a high vapor pressure at room temperature. Thus, LPG products need to be stored in closed containers (closed (spherical) tanks, trucks, pipelines, cylinders, etc.) to avoid rapid and massive evaporation losses.

Commonly, storage vapor pressures range between approx. 100 to 1 000 kPa (15 to 150 lbf/in²), depending on the vapor and liquid temperature and LPG composition. Within a closed container, LPG is therefore present as liquid to a certain filling level, while the remaining space in the tank is filled with LPG vapor.

In this working paper, we briefly describe the calculation steps required to calculate the total product mass (contained in the vapor and liquid LPG phase).

Based on such calculations, stock control measurements as well as opening and closing tank dips in large LPG tanks can be made, allowing a precise determination of product quantities (e.g. transfer quantities).


We also show how QuantityWare BCP and BCG conversion groups can be configured to calculate all required data which is required e.g. within SAP Oil & Gas tank management processes.

2. LPG tank measurements – stock control

As an example, let's look at a situation in a refinery that distributes LPG via trucks to its customers.

LPG is stored in closed spherical tanks. For a certain tank, a movement is planned of 10 000 gallons of LPG (e.g. commercial propane) into an LPG truck.

Before the movement starts, the situation is described in the picture down below:

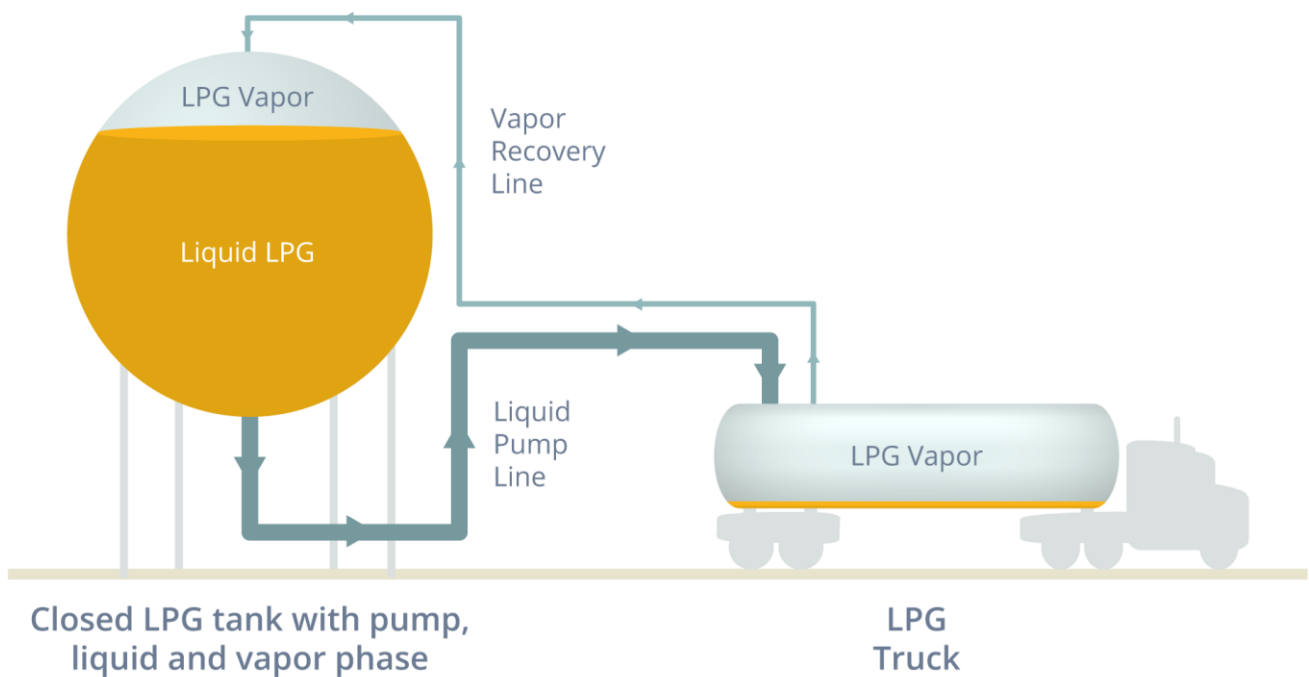

The closed LPG tank contains liquid commercial propane to a certain filling level (indicated by the horizontal line) and the remaining tank volume is filled with LPG vapor. The LPG truck contains a few gallons of liquid LPG and the remaining tank volume is filled with LPG vapor.

The loading process is started and the truck is filled via a liquid pump line, LPG vapor is recovered from the truck and flows back into the LPG tank (not necessarily via a separate line).

Before the loading starts, the following parameters are measured:


- The liquid tank levels
- The observed liquid LPG temperature
- The vapor pressure and vapor temperature of LPG gas within the tank.

An LPG sample has been analyzed by a laboratory to determine the LPG composition, density and molar mass.

The tank capacity is also known.

With this data, an opening dip measurement can be taken and calculation of the liquid volume at observed and standard reference temperature (e.g. 60 °F), as well as the total mass of the vapor and liquid can be made. The vapor calculation basically utilizes the ideal gas equation and is described in detail in various LPG measurement standards, e.g. DIN 51650 or ISO 6578, which are the basis for BCP and BCG implementations.

After truck loading is complete, we observe the following situation:

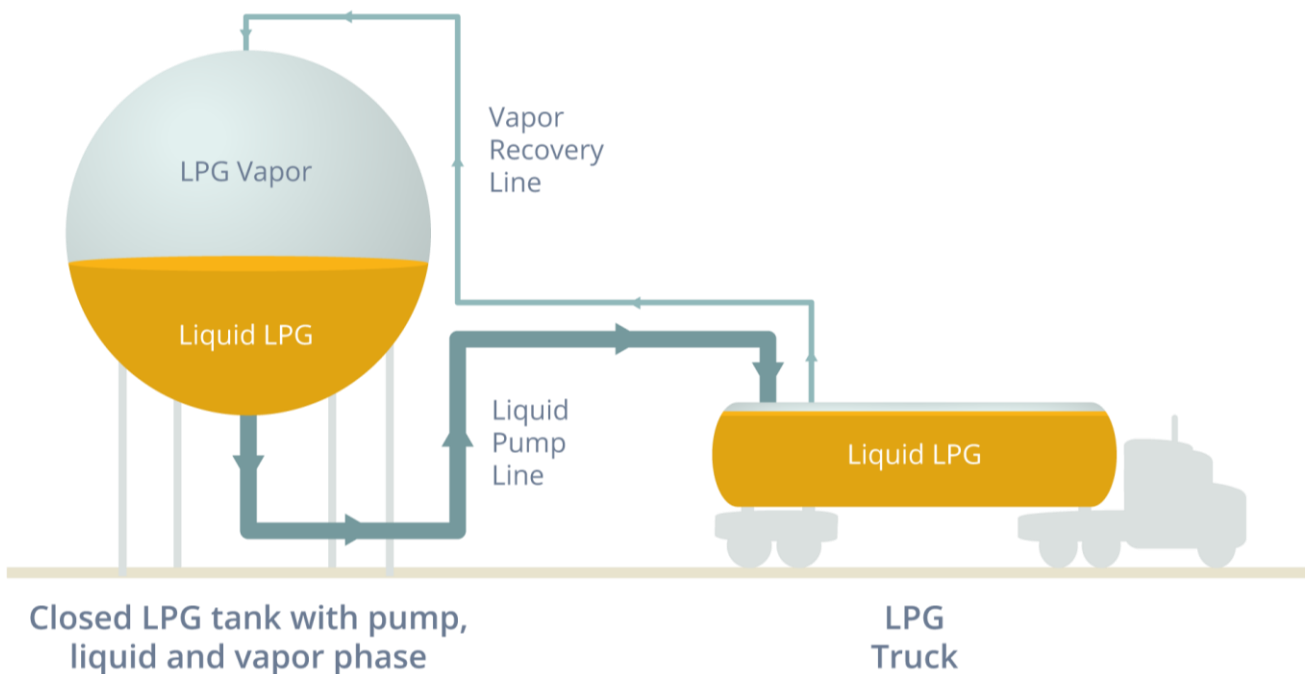

Within the tank, the liquid level has dropped and the truck has been loaded (within allowed maximum loading limits) with LPG.

A second measurement (closing dip), determining again the data described above, is made.

Determination of the total LPG product that has been transferred is now relatively simple.

Subtract the opening and closing quantity results to obtain the transferred mass and liquid volume. Here, we assume that the filling and recovery line status before and after loading is the same.

A second parallel measurement can also be made - the truck can be weighed on a weigh bridge before the start of loading and after loading completion, to obtain an independent measurement of the LPG mass transferred.



It is important to note that for closed LPG containers, the air buoyancy of an empty container tare measurement and the filled container gross measurement is almost identical, thus the air buoyancy correction can be neglected.

Vapor space calculations do update the mass and energy values (in any UoM), but **not the volume** quantities, which always represent the liquid part of the product (ISO 6578 definition, business practice) - Thus, for your LPG products, you must use a mass or energy UoM in the SAP material master if vapor space calculations are relevant, such that valuation calculations within SAP ERP processes consider the total product quantity.

3. BCP & BCG conversion group calculations


SAP Tank Management supports the capture of several tank dip types. Opening and closing dips can be captured in the ERP system within the Tank Management transactions.

To directly post goods movements for a transfer posting, customers have to build their own logic within an SAP Tank Management Business Add In (BAI).

If you utilize a QuantityWare BCP or BCG LPG vapor space conversion group, you simply take the relevant opening and closing dips and calculate the difference quantities for goods movement posting, which you then pass to the standard SAP function module (e.g. BAPI "GoodsMovementOil").

Example:

Our LPG tank has a total capacity of 500 000 gallons. We take an opening dip and measure 400 000 gallons of liquid, as well as the observed temperature, vapor temperature and pressure:

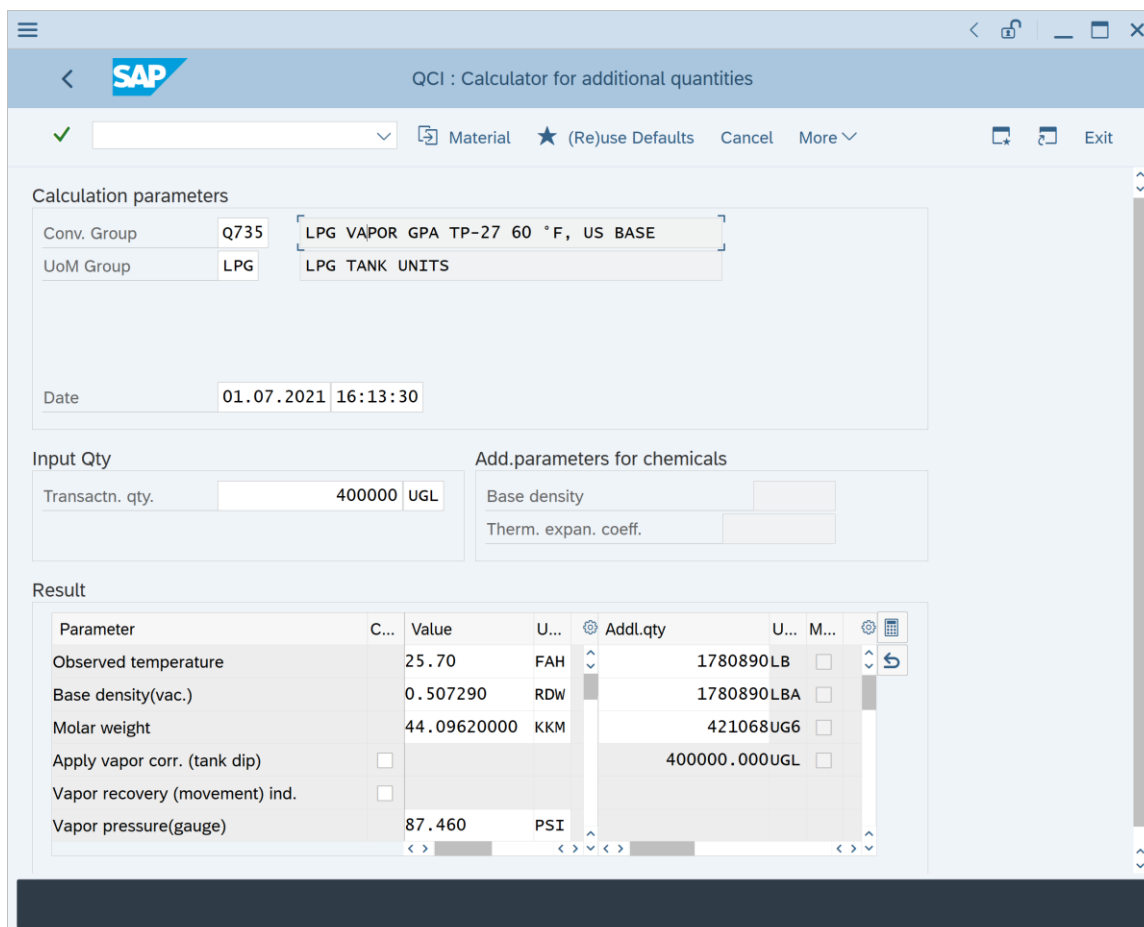


The screenshot shows the SAP QCI: Calculator for additional quantities interface. The window title is "QCI : Calculator for additional quantities". The interface includes a navigation bar with a back arrow, the SAP logo, and a title bar. Below the navigation bar, there are several sections:

- Calculation parameters:**
 - Conv. Group: Q735
 - UoM Group: LPG
 - Material: LPG VAPOR GPA TP-27 60 °F, US BASE
 - Material: LPG TANK UNITS
 - Date: 01.07.2021 16:13:30
- Input Qty:**
 - Transactn. qty.: 400000 UGL
- Add.parameters for chemicals:**
 - Base density: [empty]
 - Therm. expan. coeff.: [empty]
- Result:**

Parameter	C...	Value	U...	Add.qty	U...	M...
Observed temperature		25.70	FAH	1780890LB		
Base density(vac.)		0.507290	RDW	1780890LBA		
Molar weight		44.09620000	KKM	421068UG6		
Apply vapor corr. (tank dip)	<input type="checkbox"/>			400000.000UGL		
Vapor recovery (movement) ind.	<input type="checkbox"/>					
Vapor pressure(gauge)		87.460	PSI			

Without the vapor corr. (tank dip) indicator, we calculate a total mass of 1 780 890 pounds (rounded). We need to set the indicator to include the vapor mass:

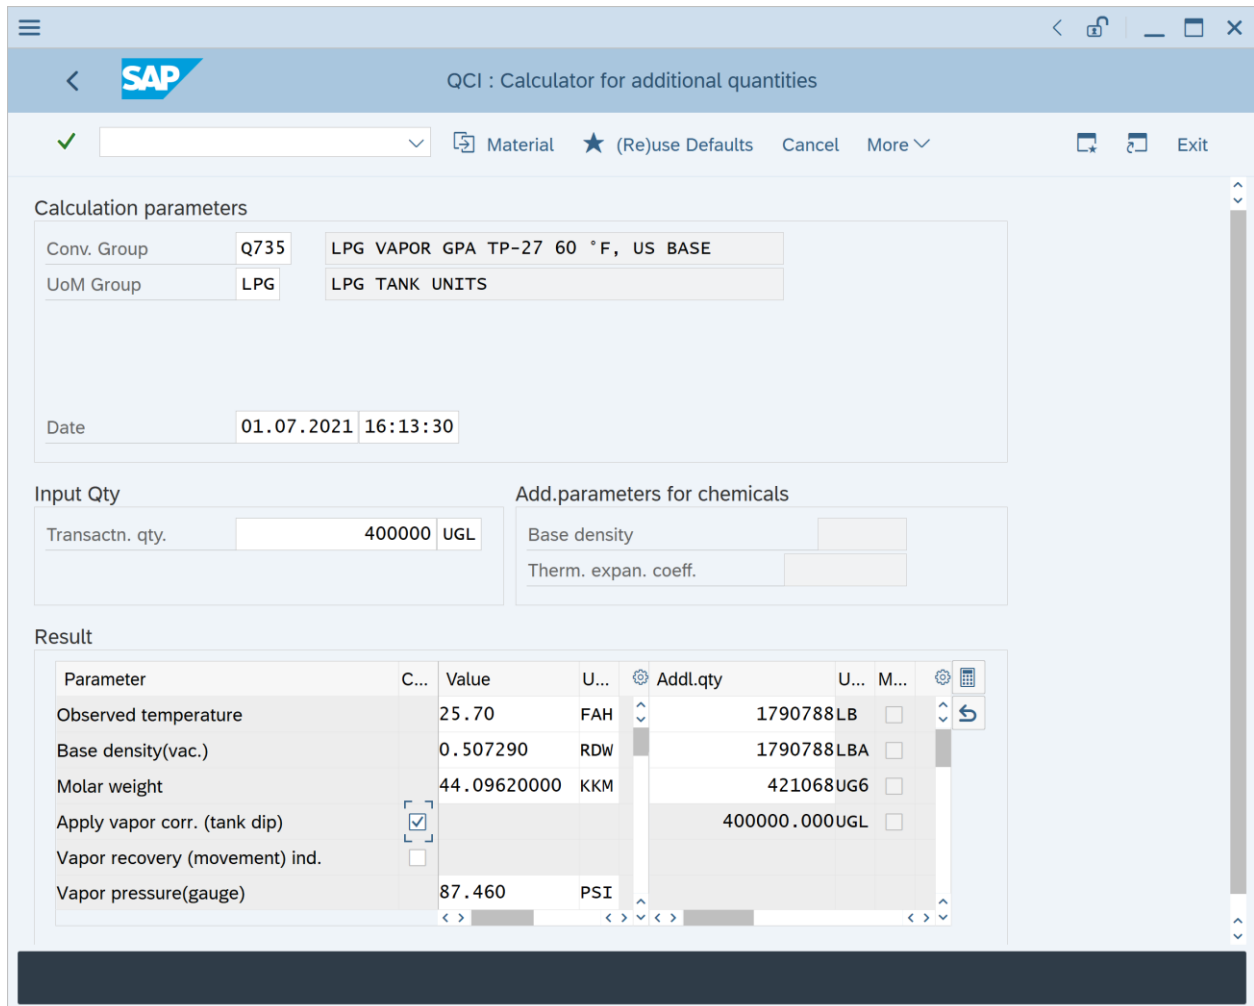

The screenshot shows the SAP QCI: Calculator for additional quantities interface. The window title is "QCI : Calculator for additional quantities". The SAP logo is visible in the top left corner. The interface includes a navigation bar with a back arrow, a search field, and buttons for "Material", "(Re)use Defaults", "Cancel", and "More". There are also icons for "Print", "Refresh", and "Exit".

Calculation parameters

Conv. Group: Q735 LPG VAPOR GPA TP-27 60 °F, US BASE
 UoM Group: LPG LPG TANK UNITS

Date: 01.07.2021 16:13:30

Input Qty

Transactn. qty.: 400000 UGL


Add.parameters for chemicals

Base density: []
 Therm. expan. coeff.: []

Result

Parameter	C...	Value	U...	Addl.qty	U...	M...
Observed temperature		25.70	FAH	1790788LB		<input type="checkbox"/>
Base density(vac.)		0.507290	RDW	1790788LBA		<input type="checkbox"/>
Molar weight		44.09620000	KKM	421068UG6		<input type="checkbox"/>
Apply vapor corr. (tank dip)				400000.000UGL		<input checked="" type="checkbox"/>
Vapor recovery (movement) ind.						<input type="checkbox"/>
Vapor pressure(gauge)		87.460	PSI			<input type="checkbox"/>

Now the mass is 1 790 788 pounds, which includes the vapor mass. The vapor mass is displayed as well as the observed vapor density, so that terminal operators can always reproduce the result:

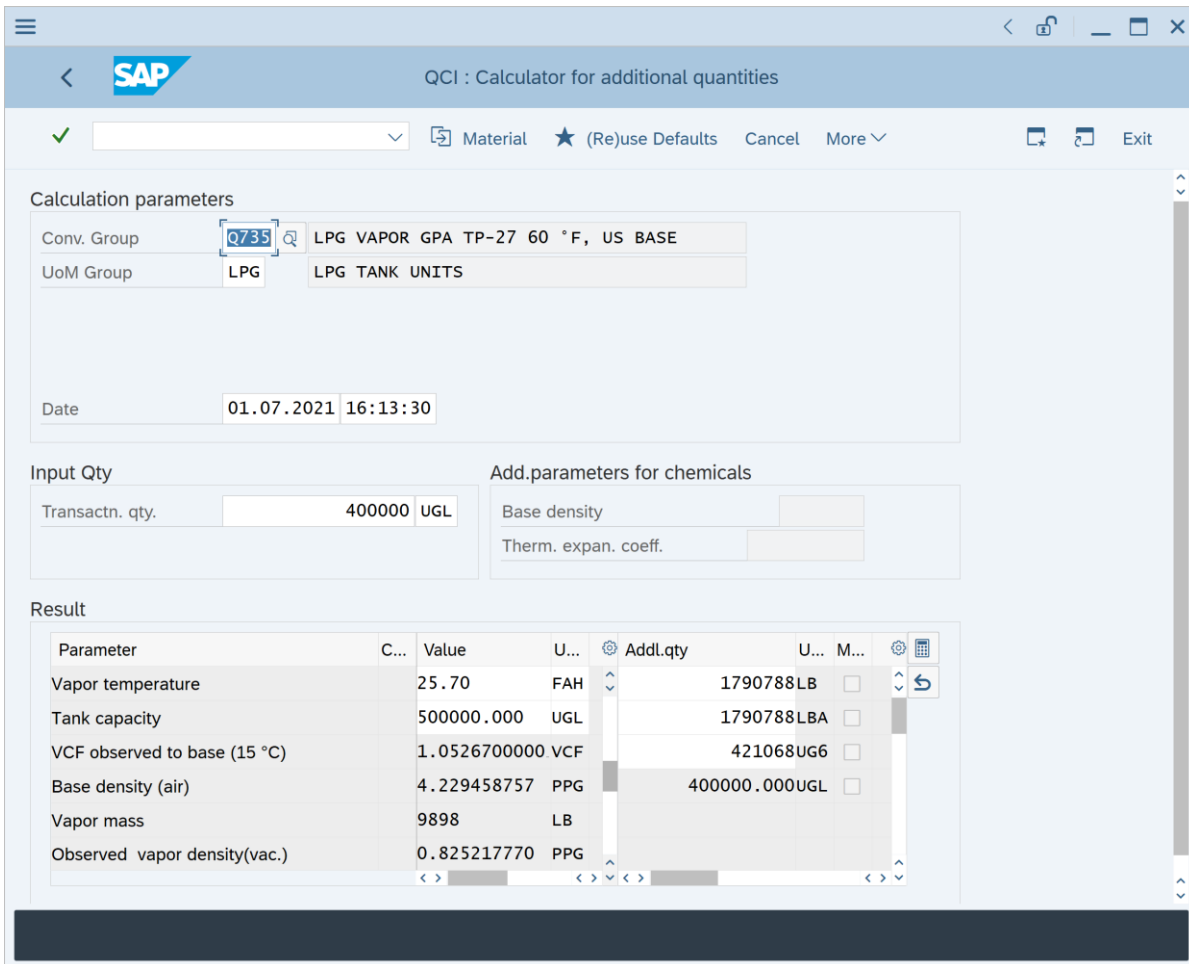

Calculation parameters

Conv. Group: Q735 LPG VAPOR GPA TP-27 60 °F, US BASE
 UoM Group: LPG LPG TANK UNITS

Date: 01.07.2021 16:13:30

Input Qty

Transactn. qty: 400000 UGL


Add.parameters for chemicals

Base density:
 Therm. expan. coeff.:

Result

Parameter	C...	Value	U...	Addl.qty	U...	M...
Vapor temperature		25.70	FAH	1790788LB		
Tank capacity		500000.000	UGL	1790788LBA		
VCF observed to base (15 °C)		1.0526700000	VCF	421068UG6		
Base density (air)		4.229458757	PPG	400000.000UGL		
Vapor mass		9898	LB			
Observed vapor density(vac.)		0.825217770	PPG			

After truck loading, the closing dip measurement is taken; for the sake of simplicity, we assume that the vapor temperature and pressure temperature did not change and thus enter the same final vapor pressure and vapor temperature values:

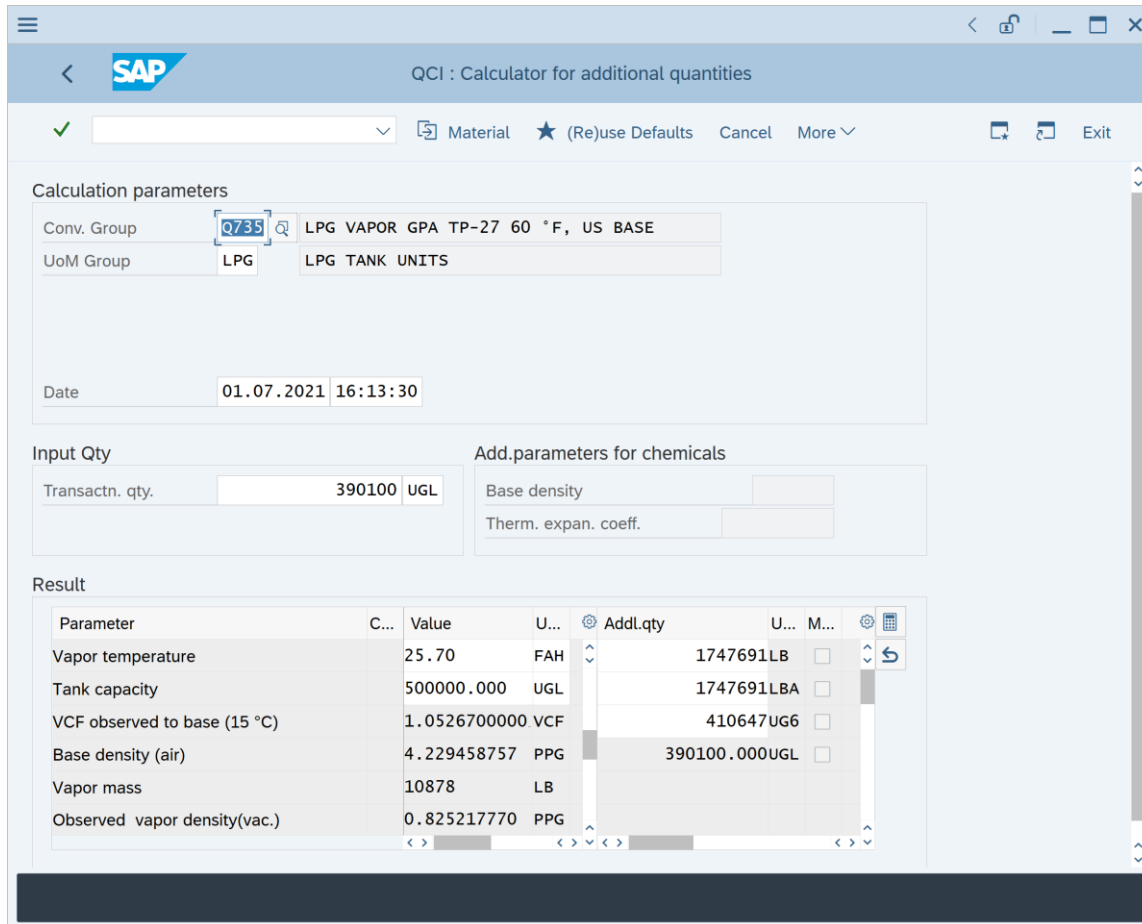

The screenshot shows the SAP QCI: Calculator for additional quantities interface. The window title is "QCI : Calculator for additional quantities". The interface includes a search bar with a checkmark, a dropdown menu, and buttons for "Material", "(Re)use Defaults", "Cancel", "More", and "Exit".

Calculation parameters:

- Conv. Group: Q735 (selected), LPG VAPOR GPA TP-27 60 °F, US BASE
- UoM Group: LPG, LPG TANK UNITS
- Date: 01.07.2021 16:13:30

Input Qty:

- Transactn. qty.: 390100 UGL

Add.parameters for chemicals:

- Base density: [empty]
- Therm. expan. coeff.: [empty]

Result:

Parameter	C...	Value	U...	Addl.qty	U...	M...
Vapor temperature		25.70	FAH	1747691LB		
Tank capacity		500000.000	UGL	1747691LBA		
VCF observed to base (15 °C)		1.0526700000	VCF	410647UG6		
Base density (air)		4.229458757	PPG	390100.000UGL		
Vapor mass		10878	LB			
Observed vapor density(vac.)		0.825217770	PPG			

These results are posted with the tank dips, if such a conversion group is assigned to the tank and product. By simply observing the difference for the gallon at 60 °F and pound values, we know how much LPG product we have loaded onto the truck and can post this data for the goods movement ticket.

In this example, we would set the manual quantity indicator to 'U' so that the QuantityWare MQCI accepts the values without additional calculation steps & checks.

If a customer does not use SAP Tank Management, it is still possible to post movement data which includes vapor corrections. For this scenario, as defined in standard ISO 6578, you enter the total liquid volume that has been transferred, the flowing liquid density and the closing dip vapor data. By setting the vapor recovery (movement) indicator instead of the tank dip vapor indicator, the QuantityWare MQCI then adjusts the mass as defined in ISO 6578, basically reducing the total mass by the mass that is contained in the displaced vapor volume of the liquid.

4. Conclusion

With QuantityWare BCP and BCG, vapor space calculations for LPG products can be easily integrated into your SAP Oil & Gas logistics transactions. The LPG calculations that we described briefly in this working paper are available with QuantityWare BCS, also for LNG calculations.

Energy calculations for LPG based on ISO 6578 are also included in QuantityWare BCS.

Legal Notices

© Copyright 2021 QuantityWare GmbH. All rights reserved.

SAP, R/3, mySAP, mySAP.com, xApps, xApp, SAP NetWeaver, and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP AG in Germany and in several other countries all over the world. All other product and service names mentioned are the trademarks of their respective companies.

Microsoft, Windows, SQL-Server, PowerPoint and Outlook are registered trademarks of Microsoft Corporation.

These materials and the information therein are subject to change without notice. These materials are provided by the company QuantityWare GmbH for informational purposes only. There is no implied representation or warranty of any kind, and QuantityWare GmbH shall not be liable for errors or omissions with respect to the materials provided. The only warranties for the products and services of QuantityWare GmbH are those set forth in the express warranty statements accompanying such products and services, if any. No statement within this document should be construed as constituting an additional warranty.